

# WOODS

## MULTI-SPINDLE ROTARY CUTTERS



Durable and easy-to-use cutters for  
brush cutting and crop shredding


**WOODS**

## Multi-spindle Rotary Cutters

### Table of Contents

<b>30- and 40-Series, Dual-spindles</b> .....	<b>4</b>
<b>DS8.30</b> 96-inch, pull-type	
<b>MDS8.30</b> 96-inch, 3-point mounted	
<b>DS10.40</b> 120-inch, pull-type	
<b>MDS10.40</b> 120-inch, 3-point mounted	
<b>50- and 60-Series, Dual- and Triple-spindles</b> .....	<b>6</b>
<b>Dual-spindle Series</b> .....	<b>6</b>
<b>DS8.50</b> 96-inch, pull-type	
<b>MDS8.50</b> 96-inch, 3-point mounted	
<b>DS10.50</b> 120-inch, pull-type	
<b>MDS10.50</b> 120-inch, 3-point mounted	
<b>DS12.50</b> 144-inch, pull-type	
<b>MDS12.50</b> 144-inch, 3-point mounted	
<b>50-Series Offset Dual-spindle</b> .....	<b>7</b>
<b>DSO8.50</b> 96-inch, semi-mounted	
<b>DSO10.50</b> 120-inch, semi-mounted	
<b>60-Series Triple-spindle</b> .....	<b>8</b>
<b>TS14.60</b> 168-inch	
<b>MTS14.60</b> 168-inch	
<b>Specifications Chart</b> .....	<b>10</b>

More than a dozen gear- and belt-driven models

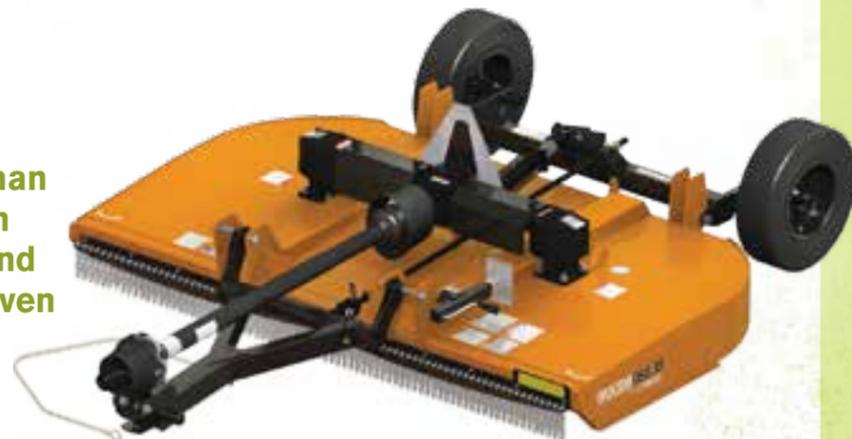

**DS8.30**  
shown with chain shielding

### Legend

**30-Series**  
Tractor PTO range 35-100 hp

**40-Series**  
Tractor PTO range 40-120 hp

**50-Series**  
Tractor PTO range 50-200 hp

**60-Series**  
Tractor PTO range 70-230 hp



Since 1946, we've been manufacturing in Oregon, Illinois, and supporting the growth of American jobs.

### Woods GENUINE PARTS

Maintain the quality and performance of your Woods equipment with Woods genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.

**Find a Woods Dealer**  
Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at [woodsequipment.com](http://woodsequipment.com) or call 800-319-6637.

### Easy to Use

The proven leader in the cutter business delivers a full line of durable easy-to-use rotary cutters. Choose our classic belt-driven model or a 30-, 40-, 50- or 60-series model loaded with features that help you work efficiently and effectively – whatever you're cutting or shredding.

- A floating hitch allows the cutter to follow the terrain. Cross steep inclines and ditches with ease
- Changing cutting blades is a snap with the exclusive Woods Quick Change Blade Pin System, standard on all gear-driven dual-spindle cutters. 50-Series models also feature a large blade access window in the deck
- The 50-series offers variable wheel spacing so you can adjust the wheels for row crops

### Hard to Break

You'll rely on your Woods rotary cutter for years because we still manufacture them with the same dependable quality that we've built in since 1946.

- Woods gearboxes feature heat-treated, alloy steel gears that stand up to the demands of rotary cutting
- Sloped-top decks shed water and debris to prevent rust and corrosion and wrap around a heavy steel superstructure
- Spring cushion axles reduce stress spikes to keep your Woods rotary cutter delivering high-performance cutting<sup>1</sup>
- Factory balanced stump jumpers are standard. Avoid hazards and save your blades from wear and tear


<sup>1</sup>) N/A on DS8.30 and DS10.40



**DS8.30** shown with chain shielding

## Multi-spindle Rotary Cutters

30- and 40-Series

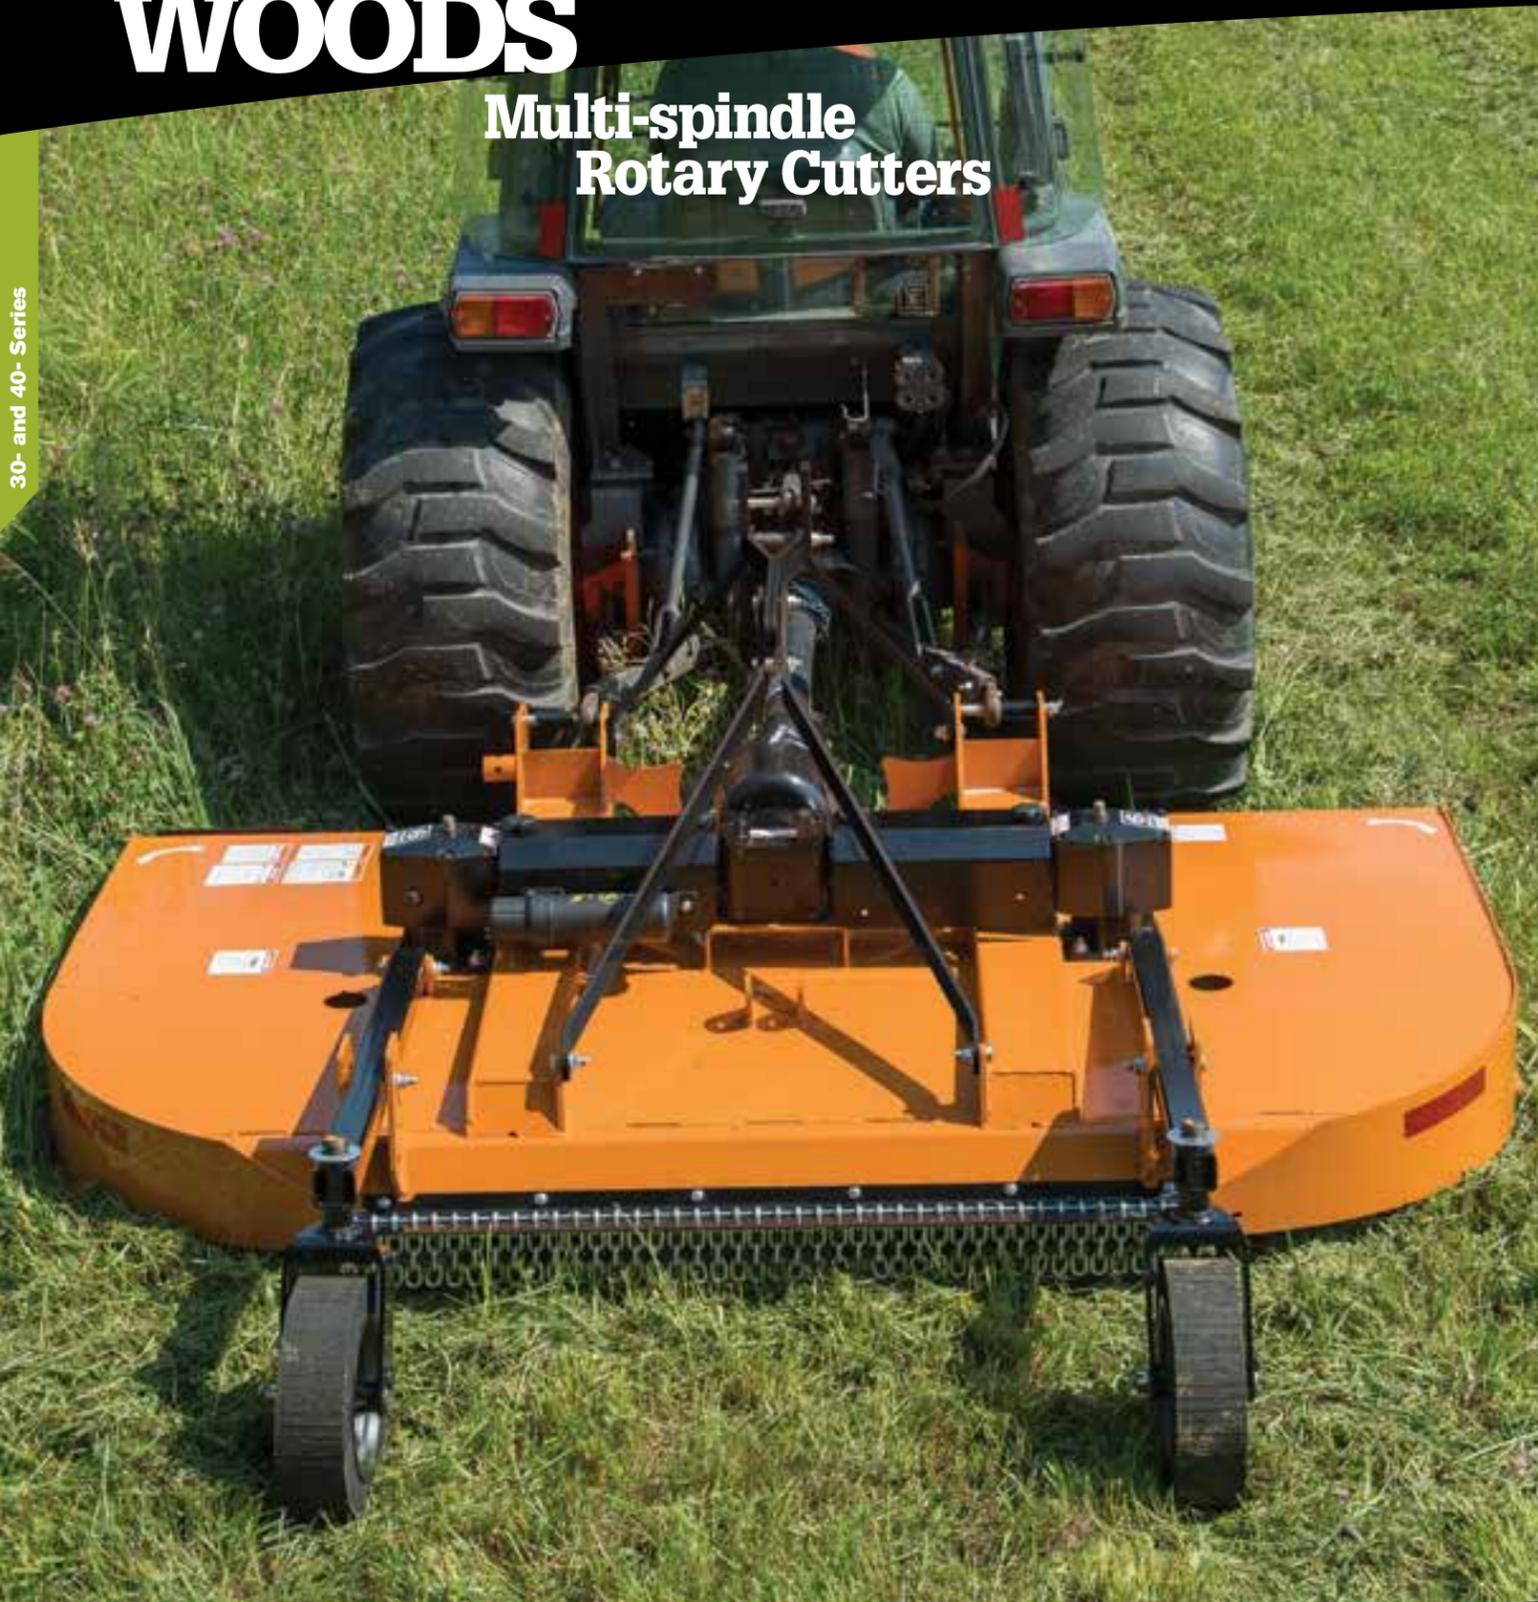

## 30- and 40-Series Dual-spindles

### Models

- DS8.30** 96-inch, pull-type
- MDS8.30** 96-inch, 3-point mounted
- DS10.40** 120-inch, pull-type
- MDS10.40** 120-inch, 3-point mounted

Tractor PTO range: 35–120 hp

- Cuts light brush up to 1.5 inches (30-Series) to 2 inches (40-Series) in diameter
- Variable wheel spacing
- Six-year limited gearbox warranty

### Sloped Top Deck

Smooth, sloped deck sheds water and debris to prevent rust and corrosion



**DS8.30**  
shown with chain shielding



**DS10.40**  
shown with chain shielding

### CV Drive

Less maintenance, smoother operation

30- and 40-Series

## Multi-spindle Rotary Cutters

### 50-Series Dual-spindles

#### Models

- DS8.50** 96-inch, pull-type
- MDS8.50** 96-inch, 3-point mounted
- DS10.50** 120-inch, pull-type
- MDS10.50** 120-inch, 3-point mounted
- DS12.50** 144-inch, pull-type
- MDS12.50** 144-inch, 3-point mounted

Tractor PTO range: 50–200 hp

- Cuts brush up to 3 inches in diameter
- Variable wheel spacing
- Thumb-screw dipstick



Our new gearbox seal technology features advanced engineering and material specifically developed for heavy-duty jobs in harsh environments.



Our industry-leading six-year warranty covers the gearbox plus the seals - for worry-free performance.

#### Quick Change Blade Pins

Easy to replace Quick Change blade pins under the deck reduce down time

#### Hydraulically Adjustable Tail Wheel

Hydraulic tail wheel offers a variable cutting range



**MDS8.50, mounted**  
shown with chain shielding

#### Tubular Front Frame

Greater strength and rigidity for towing

#### Bolt-on Skid Shoes

Skid shoes run the full length and are replaceable

#### Large Access Window

Large blade access window for easy maintenance

### 50-Series Offset Dual-spindles

Woods' rugged and powerful 50-Series offset models are ideal for orchards, tree-lined fields and any setting with overhangs.

#### Models

- DSO8.50** 96-inch, semi-mounted
- DSO10.50** 120-inch, semi-mounted

Tractor PTO range: 50–200 hp

- Cuts brush up to 3 inches in diameter
- Variable wheel spacing
- DSO8.50 Hydraulic variable offset 21 inches to the right or 5 inches left
- DSO10.50 Hydraulic variable offset 27 inches to the right or 5 inches left
- Six-year limited gearbox warranty

#### Hydraulic Variable Offset



**DSO8.50**  
5" to the left

**DSO8.50**  
21" to the right

**DSO10.50**  
5" to the left

**DSO10.50**  
27" to the right

## Multi-spindle Rotary Cutters

### 60-Series Triple-spindles

#### Triple Spindle Models

**TS14.60** 168-inch

**MTS14.60** 168-inch

Tractor PTO range: 70–230 hp


- Optional shredding kit for corn, cotton and milo
- Standard high-torque drive train and baffles
- Variable wheel spacing
- Six-year limited gearbox warranty

**This heavy-duty rotary cutter is versatile, rugged, and built to handle a host of applications. A solid and all-around performer, this triple-spindle cutter is well suited for orchard, commercial, and agricultural use such as crop shredding.**



**TS14.60** shown with optional chain shielding and height adjustment cylinder

#### Optional Shredding Kit for superior crop shredding

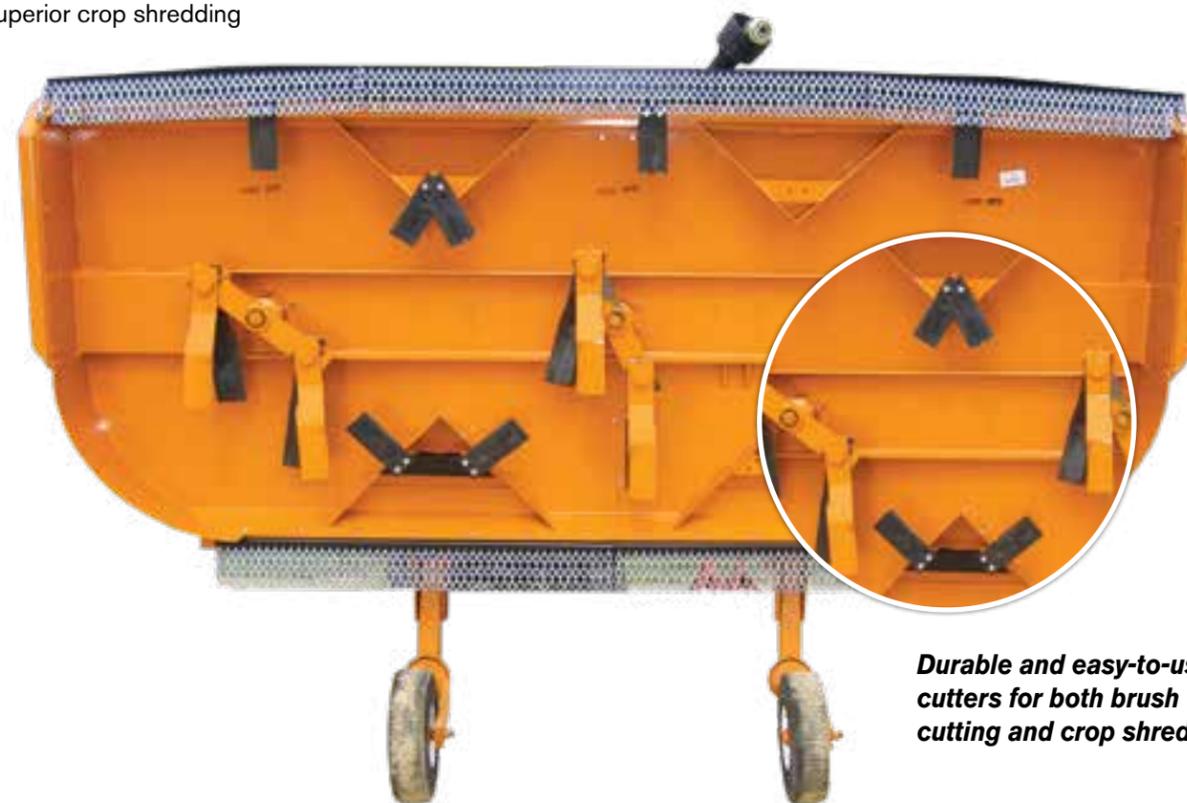

*Durable and easy-to-use cutters for both brush cutting and crop shredding.*



### Woods Multi-spindle Rotary Cutters

Check out our video on the Woods Equipment channel on YouTube®.

## Multi-spindle Rotary Cutters

Specifications	DS8.30 (pull-type) MDS8.30 (3-point mounted)	DS10.40 (pull-type) MDS10.40 (3-point mounted)	DS8.50 (pull-type) MDS8.50 (3-point mounted)	DSO8.50 (offset, semi-mounted)	DS10.50 (pull-type) MDS10.50 (3-point mounted)	DSO10.50 (offset, semi-mounted)	DS12.50 (pull-type) MDS12.50 (3-point mounted)	TS14.60 (pull-type) MTS14.60 (3-point mounted)
<b>Minimum Tractor PTO HP</b>	pull-type: 35 hp mounted: 45 hp	pull-type: 40 hp mounted: 60 hp	pull-type: 40 hp mounted: 55 hp	semi-mounted: 40 hp	pull, semi-mounted: 50 hp mounted: 65 hp	semi-mounted: 50 hp	pull, semi-mounted: 50 hp mounted: 70 hp mounted	pull-type: 70 hp with front weight mounted: 90 hp
<b>Hitch Category / Type</b>	pull-type: pivoting clevis mounted: Cat 1 or 2 / clevis	pull-type: pivoting clevis mounted: Cat 2 & 3 / clevis	pull-type: pivoting clevis mounted: Cat 2 & 3 / clevis	Cat 2 or 3 / clevis	pull-type: pivoting clevis mounted: Cat 2 & 3 / clevis	Cat 2 or 3 / clevis	pull-type: pivoting clevis mounted: Cat 2 & 3 / clevis	pull-type, Cat 2 or 3 / clevis
<b>Hydraulic Variable Offset</b>	N / A			21 inches to the right, 5 inches to the left	N / A	27 inches to the right, 5 inches to the left	N / A	
<b>Cutting Width</b>	96"	120"	96"	96"	120"		144"	168"
<b>Cutting Height Range</b>	2-12"							
<b>Cutting Capacity</b>	1.5"	2"	3"					
<b>Gearbox Horsepower Rating</b>	100 hp center, 75 hp spindle	120 hp center, 90 hp spindle	205 hp center, 160 hp spindle	205 hp center, 160 hp outer	205 hp splitter, 160 hp spindle	205 hp splitter, 160 hp blade spindle	205 hp splitter, 160 hp spindle	235 hp splitter, 205 hp spindle
<b>Blade Tip Speed</b>	15,200 fpm	16,700 fpm	540 rpm / 14,886 fpm, 1,000 rpm / 15,126 fpm	540 rpm / 14,886 fpm, 1,000 rpm / 15,126 fpm	540 rpm / 15,974 fpm, 1,000 rpm / 16,232 fpm		540 rpm / 16,240 fpm, 1,000 rpm / 16,487 fpm	15,540 fpm
<b>Deck Side Depth</b>	10"		13"			12.6"	12.4"	
<b>Deck Thickness</b>	10 ga. (.135")							
<b>Overall Width</b>	100"	124"	103"	103"	127"		152"	176"
<b>Overall Length</b>	pull-type: 142" (25" tires) mounted: 96"	pull-type: 155" (25" tires) mounted: 110"	pull-type: 150" (25" tires) mounted: 99"	122"	pull-type: 162" mounted: 111"	128"	pull-type: 175" mounted: 125"	pull-type: 158" mounted: 123"
<b>Approximate weight</b>	pull-type: 1,467 lbs mounted: 1,213 lbs	pull-type: 1,847 lbs mounted: 1,576 lbs	pull-type: 2,238 lbs mounted: 2,069 lbs	2,335 lbs	pull-type: 2,537 lbs mounted: 2,373 lbs	2,510 lbs	3,062 lbs	3,730 lbs
<b>Blade Dimensions</b>	.5" x 4"							
<b>Wheel Selection</b>	laminated, severe duty new ag, foam filled new ag, 15" rims		laminated, severe duty new ag, foam filled new ag, 15" rims, used aircraft	15" laminated	laminated, severe duty new ag, foam filled new ag, 15" rims, used aircraft	21" laminated	laminated, severe duty new ag, foam filled new ag, 15" rims, used aircraft	
<b>Optional Dual Wheels – Pull-Type</b>	no		yes	no	yes	no	yes	
<b>Quick-Hitch Ready</b>	yes			no	yes	no	yes	
<b>Gearbox Warranty</b>	6 years			6 years, includes seals				6 years
	30-Series	40-Series	50-Series				60-Series	



<b>POWER TEAM</b>	<b>Got ideas?</b> Join our customer panel at <a href="http://woodsequipment.com/power">woodsequipment.com/power</a> . <b>You have the power...</b>
-----------------------	--

**WOODS®** | A Blount International Brand  
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 [woodsequipment.com](http://woodsequipment.com)



Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2018 Woods Equipment Company. All rights reserved. WOODS, and the Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.